

SmartBright Slim Panel G2

RC091V LED36S/865 PSU W60L60 GM G2

Power supply unit external (PSU) - - Polystyrene bowl/cover prismatic - 120°

The SmartBright Slim Panel provides the most affordable LED solution. The complete product family delivers multiple mounting types, product dimensions and lumen options. The new generation ensures both higher system efficacy and excellent lighting uniformity.

Product data

General Information	
Beam angle of light source	- °
Light source colour	865 cool daylight
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	PSU-E [Power supply unit external (PSU)]
Driver included	Yes
Optic type	No [-]
Optical cover/lens type	Polystyrene bowl/cover prismatic
Luminaire light beam spread	120°
Control interface	-
Connection	Connection unit 2-pole
Cable	-
Protection class IEC	Safety class II (II)
Glow-wire test	650/30 [Temperature 650 °C, duration 30 s]
Flammability mark	NO [-]
CE mark	CE mark

ENEC mark	-
Warranty period	3 years
Constant light output	No
Number of products on MCB (16 A type B)	57
EU RoHS compliant	Yes
Light source engine type	LED

Operating and Electrical

Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Inrush current	6.56 A
Inrush time	0.05 ms
Power factor (min.)	0.9

Controls and Dimming

Dimmable	No
----------	----

SmartBright Slim Panel G2

Mechanical and Housing

Housing material	Aluminum extruded
Reflector material	-
Optic material	Polymethyl methacrylate
Optical cover/lens material	Polystyrene
Fixation material	-
Optical cover/lens finish	Frosted
Overall length	597 mm
Overall width	597 mm
Overall height	31.5 mm
Colour	White

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3600 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	90 lm/W
Init. Corr. Colour Temperature	6500 K
Init. Colour rendering index	>80
Initial chromaticity	(0.38, 0.38) SDCM≤5

Initial input power	40 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Median useful life L70B50	25000 h
---------------------------	---------

Application Conditions


Ambient temperature range	-10 to +35 °C
Maximum dimming level	Not applicable
Suitable for random switching	No

Product Data

Full product code	871016332472200
Order product name	RC091V LED36S/865 PSU W60L60 GM G2
EAN/UPC – product	8710163324722
Order code	32472200
SAP numerator – quantity per pack	1
Numerator – packs per outer box	4
SAP material	911401723822
SAP net weight (piece)	2.000 kg



Dimensional drawing

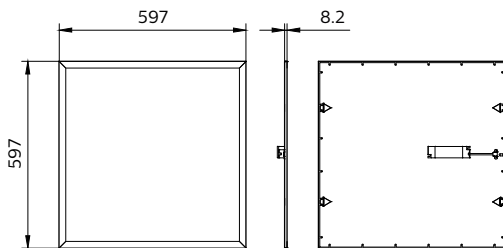

RC091V LED26S/LED36S PSU

