




Celino LED

Celino LED is a complete luminaire range that reflects the market trend towards miniaturisation and architectural integration, while delivering a significant advance in optical performance. Made of natural anodised aluminium, the housing of Celino LED is a mere 71mm wide and has die cast- aluminium end caps.



Features and Benefits

- Compliance with latest office - lighting norm
- Complete luminaire range that reflects the trend to miniaturisation and architectural integration
- Excellent optical performance: optical covers for optimum visual comfort and efficiency
- Inspiring: aesthetical and novel design with visually better ceiling integration
- Comfort: spacious and pleasant environment with comfortable lighting appearance
- Efficient: high efficacy achieved with optics innovation

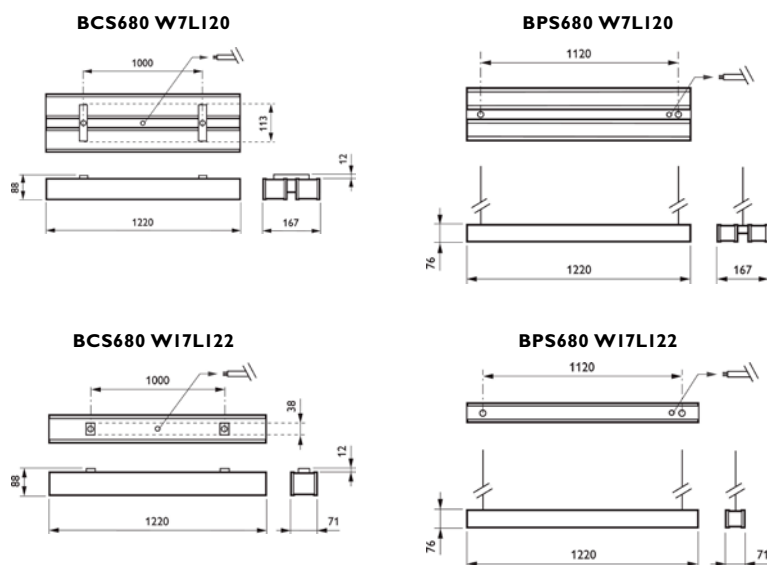

Product ID	L (mm)	W (mm)	H (mm)
BCS680 W7L120	1220	167	88
BPS680 W7L120	1220	167	76
BCS680 W17L122	1220	71	88
BPS680 W17L122	1220	71	76

Dimensions in mm (Nominal) (H – including driver)



Celino LED continued

CELINO LED			
Family name	Celino LED	Driver	Integrated driver
Model	BCS680 - Surface BPS680 - Suspended	Dimmable	Fixed output and DALI compatible
Lumen/Watt	LIN-PC: 2050lm/ 23W (3000K) LIN-PC: 2050lm/ 21.5W (4000K) LIN-PC: 4100lm/ 46W (3000K) LIN-PC: 4100lm/ 43W (4000K) MLO-PC: 1650lm/ 23W (3000K) MLO-PC: 1650lm/ 21.5W (4000K) MLO-PC: 3300lm/ 46W (3000K) MLO-PC: 3300lm/ 43W (4000K)	Installation	Surface and Suspended mounting
Correlated Colour Temperature (CCT)	3000K, 4000K	IP rating	IP40
Colour Rendering Index (CRI)	80	Weight	W7L120 - 4.2kg W17L120 -7.8kg
Flex and Plug	Not included	Colour of housing	Housing: natural anodised aluminium, End caps: die-cast aluminium
Lifetime L70*	50,000hrs	Application	Retail, Hospitality, Offices, Healthcare
Unified Glare Ratio (UGR)	19	Accessories	n/a
Optics	LIN-PC: OLC micro-lens optic in polycarbonate cover MLO-PC: OLC micro-lens optic in polycarbonate cover	Suspension Height - min/max	n/a
		Maximum Run Length	n/a

* = When the fitting reaches 70% of full potential (new)

COMMERCIAL CODE	I2NC	DESCRIPTION
CELINO LED - SURFACE MOUNTED		
BSC68022W4KDMLO	910504074703	BCS680 LED24/840 PSD W7L122 MLO-PC
BSC68022W4KDLIN	910504074803	BCS680 LED24/840 PSD W7L122 LIN-PC
BSC68043W4KDMLO	910504074903	BCS680 LED48/840 PSD W17L122 MLO-PC
BSC68043W4KDLIN	910504075003	BCS680 LED48/840 PSD W17L122 LIN-PC
CELINO LED - SUSPENDED		
BPS68022W4KDMLO	910504075303	BPS680 LED24/840 PSD W7L122 MLO-PC SM2
BPS68022W4KDLIN	910504075403	BPS680 LED24/840 PSD W7L122 LIN-PC SM2
BSC68043W4KDMLO	910710101007	BPS680 LED48/840 PSD W17L122 MLO-PC SM2
BSC68043W4KDLIN	910710101001	BPS680 LED48/840 PSD W17L122 LIN-PC SM2
BPS68023W3KDMLO	910710101002	BPS680 LED24/830 PSD W7L122 MLO-PC SM2
BPS68023W3KDLIN	910710042296	BPS680 LED24/830 PSD W7L122 LIN-PC SM2