

## ABOUT PHONO SOLAR

Phono Solar Technology Co., Ltd. is one of the world's leading renewable energy product manufacturers and a well trusted brand provider. The Phono Solar brand has become synonymous with high performing, top quality photovoltaic panels that are ideal for use in large scale power plants, commercial and residential installations.

# DIAMOND Series 235-265

HIGH PERFORMANCE SOLAR  
MODULES

**Phono<sup>®</sup> Solar**  
SHARE THE SUN, POWER THE FUTURE!

### RELIABLY HIGH YIELDS

- High efficiency solar cells together with high transmission textured glass deliver module efficiency of over 16.0%, leading to minimized installation costs and maximized system output.
- High output due to excellent performance in weak-light conditions.
- Higher specific yields due to positive power sorting.
- Product quality is assured through the use of branded components.

### QUALITY ASSURANCE

- Durability assured in even the harshest environments with AMMONIA CORROSION, SALT MIST CORROSION, and FIRE TEST certifications.
- Certified to withstand increased snow and wind loads of up to 5400Pa.
- Manufacturing facility certified by ISO 9001, ISO 14001 and OHSAS 18001.
- Internal quality control with standards higher than both IEC and UL.

### WARRANTIES

- 10-year product warranty\*
- 25-year performance warranty\*
- Free module recycling through PV Cycle Association membership\*\*



CEC



\* IN COMPLIANCE WITH OUR WARRANTY TERMS AND CONDITIONS.

\*\* IN PV CYCLE MEMBER COUNTRIES ONLY, SEE: WWW.PVCYCLE.COM

## MECHANICAL CHARACTERISTICS

<b>Solar Cells</b>	Polycrystalline 156mm x 156mm square, 6 ± 10 pieces in series
<b>Dimension</b>	Length: 1640mm (64.6 inch)
	Width: 992mm (39.1 inch)
	Height: 40mm (1.6 inch)
<b>Weight</b>	19kg (41.9lbs)
<b>Front Glass</b>	3.2mm toughened glass
<b>Frame</b>	Anodized aluminium alloy
<b>Cable</b>	0.90m wire (ø4mm <sup>2</sup> )
<b>Diodes</b>	6 pieces Schottky by-pass diodes
<b>Junction Box</b>	IP 65 rated


## ABSOLUTE MAXIMUM RATING

Parameter	Values
Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Surface Maximum Load Capacity	Up to 5400Pa
Maximum Series Fuse Rating	15A
IEC Application Class (IEC 61215)	A
Fire Rating (UL 1703)	C
Maximum System Voltage	1000V DC (IEC 61215)
	1000V DC (UL 1703)

## ELECTRICAL TYPICAL VALUES<sup>1,2</sup>

Model	Rated Power (P <sub>mpp</sub> )	Tolerance	Rated Current (I <sub>mpp</sub> )	Rated Voltage (V <sub>mpp</sub> )	Short Circuit Current (I <sub>sc</sub> )	Open Circuit Voltage (V <sub>oc</sub> )	Module Efficiency (%)
PS235P-20/U	235W	0~+5W	7.94A	29.6V	8.40A	37.3V	14.44
PS240P-20/U	240W	0~+5W	8.06A	29.8V	8.50A	37.5V	14.75
PS245P-20/U	245W	0~+5W	8.18A	30.0V	8.60A	37.7V	15.06
PS250P-20/U	250W	0~+5W	8.30A	30.2V	8.70A	37.8V	15.37
PS255P-20/U	255W	0~+5W	8.42A	30.4V	8.80A	37.9V	15.67
PS260P-20/U	260W	0~+5W	8.53A	30.6V	8.90A	38.0V	15.98
PS265P-20/U	265W	0~+5W	8.61A	30.8V	9.00A	38.1V	16.29

## DIMENSIONS

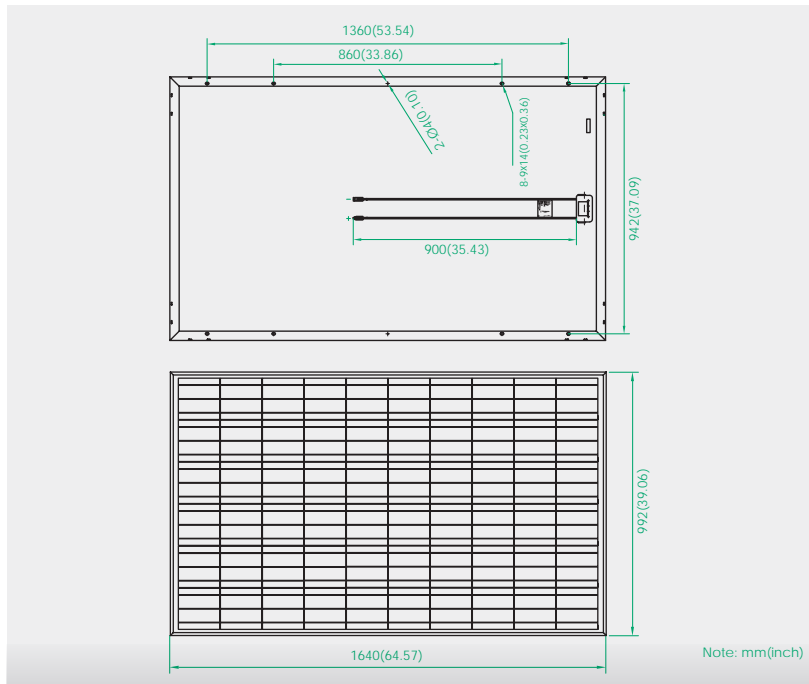

## TEMPERATURE CHARACTERISTICS

NOCT (Nominal Operation Cell Temperature)	45°C ± 2°C
Voltage Temperature Coefficient	-0.31%/K
Current Temperature Coefficient	+0.07%/K
Power Temperature Coefficient	-0.40%/K

## WEAK LIGHT PERFORMANCE

Intensity [W/m <sup>2</sup> ]	I <sub>mpp</sub>	V <sub>mpp</sub>
1000	1	1
800	0.8	0.996
600	0.6	0.99
400	0.4	0.983
200	0.2	0.952
100	0.1	0.921

## PACKING CONFIGURATION

Container	40' HQ
Pieces per pallet	24
Pallets per container	28
Pieces per container	672

## PARTNER INFORMATION

Note: This datasheet summarises product warranty and specifications, which are subject to change without notice. The exact module specification will be subject to the description in the sales contract. Further information can be found on our website: [www.phonosolar.com](http://www.phonosolar.com)

1. Defined as standard deviation of thousands measurements. Absolute power values depend on the measuring system. They can differ by +/-5% from one measuring system to another.
2. Measurement conditions under irradiance level of Standard Test Conditions(STC): 1000W/m<sup>2</sup>, Air mass 1.5 Spectrum, cell temperature of 25°C.



## ABOUT PHONO SOLAR

Phono Solar Technology Co., Ltd. is one of the world's leading renewable energy product manufacturers and a well trusted brand provider. The Phono Solar brand has become synonymous with high performing, top quality photovoltaic panels that are ideal for use in large scale power plants, commercial and residential installations.

# DIAMOND Series 280-330

HIGH PERFORMANCE SOLAR  
MODULES

**Phono<sup>®</sup> Solar**  
SHARE THE SUN, POWER THE FUTURE!

### RELIABLY HIGH YIELDS

- High efficiency solar cells together with high transmission textured glass deliver module efficiency of over 16.0%, leading to minimized installation costs and maximized system output.
- High output due to excellent performance in weak-light conditions.
- Higher specific yields due to positive power sorting.
- Product quality is assured through the use of branded components.

### QUALITY ASSURANCE

- Durability assured in even the harshest environments with AMMONIA CORROSION, SALT MIST CORROSION, and FIRE TEST certifications.
- Certified to withstand increased snow and wind loads of up to 5400Pa.
- Manufacturing facility certified by ISO 9001, ISO 14001 and OHSAS 18001.
- Internal quality control with standards higher than both IEC and UL.

### WARRANTIES

- 10-year product warranty\*
- 25-year performance warranty\*
- Free module recycling through PV Cycle Association membership\*\*



CEC



\* IN COMPLIANCE WITH OUR WARRANTY TERMS AND CONDITIONS.

\*\* IN PV CYCLE MEMBER COUNTRIES ONLY, SEE: WWW.PVCYCLE.COM

## MECHANICAL CHARACTERISTICS

<b>Solar Cells</b>	Polycrystalline 156mm x 156mm square, 6 x 12 pieces in series
<b>Dimension</b>	Length: 1956mm (77.0 inch)
	Width: 992mm (39.1 inch)
	Height: 40mm (1.6 inch)
<b>Weight</b>	23kg (50.7lbs)
<b>Front Glass</b>	3.2mm toughened glass
<b>Frame</b>	Anodized aluminium alloy
<b>Cable</b>	1.10m wire (ø4mm <sup>2</sup> )
<b>Diodes</b>	6 pieces Schottky by-pass diodes
<b>Junction Box</b>	IP 65 rated


## ABSOLUTE MAXIMUM RATING

Parameter	Values
Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Surface Maximum Load Capacity	Up to 5400Pa
Maximum Series Fuse Rating	15A
IEC Application Class (IEC 61215)	A
Fire Rating (UL 1703)	C
Maximum System Voltage	1000V DC (IEC 61215)
	1000V DC (UL 1703)

## ELECTRICAL TYPICAL VALUES<sup>1,2</sup>

Model	Rated Power (P <sub>mpp</sub> )	Tolerance	Rated Current (I <sub>mpp</sub> )	Rated Voltage (V <sub>mpp</sub> )	Short Circuit Current (I <sub>sc</sub> )	Open Circuit Voltage (V <sub>oc</sub> )	Module Efficiency (%)
PS280P-24/T	280W	0~+5W	7.82	35.8	8.35	44.8	14.43
PS290P-24/T	290W	0~+5W	8.03	36.1	8.50	45.2	14.95
PS300P-24/T	300W	0~+5W	8.24	36.4	8.65	45.6	15.46
PS310P-24/T	310W	0~+5W	8.45	36.7	8.80	46.0	15.98
PS320P-24/T	320W	0~+5W	8.66	37.0	8.95	46.4	16.49
PS330P-24/T	330W	0~+5W	8.87	37.3	9.10	46.8	17.01

## DIMENSIONS

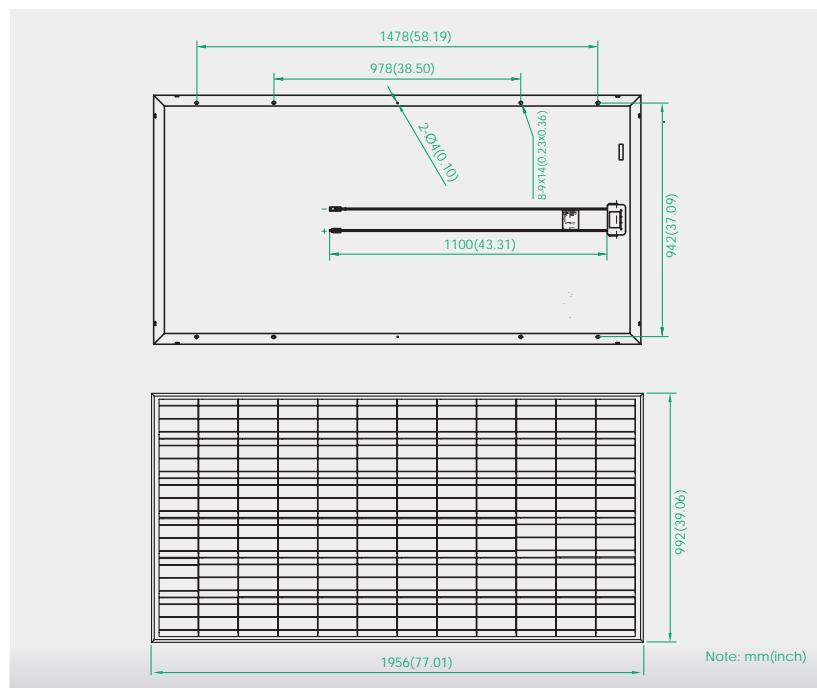

## TEMPERATURE CHARACTERISTICS

NOCT (Nominal Operation Cell Temperature)	45°C ± 2°C
Voltage Temperature Coefficient	-0.31%/K
Current Temperature Coefficient	+0.07%/K
Power Temperature Coefficient	-0.40%/K

## WEAK LIGHT PERFORMANCE

Intensity [W/m <sup>2</sup> ]	I <sub>mpp</sub>	V <sub>mpp</sub>
1000	1	1
800	0.8	0.996
600	0.6	0.99
400	0.4	0.983
200	0.2	0.952
100	0.1	0.921

## PACKING CONFIGURATION

Container	40' HQ
Pieces per pallet	24
Pallets per container	22
Pieces per container	528

## PARTNER INFORMATION

Note: This datasheet summarises product warranty and specifications, which are subject to change without notice. The exact module specification will be subject to the description in the sales contract. Further information can be found on our website: [www.phonosolar.com](http://www.phonosolar.com)

1. Defined as standard deviation of thousands measurements. Absolute power values depend on the measuring system. They can differ by +/-5% from one measuring system to another.
2. Measurement conditions under irradiance level of Standard Test Conditions(STC): 1000W/m<sup>2</sup>, Air mass 1.5 Spectrum, cell temperature of 25°C.