




GreenSpace Gen III

GreenSpace is an optimised LED downlight. Featuring a simple yet robust integrated design and high system efficacy, it offers customers a sustainable solution with a return on investment within one to three years. It conforms to general lighting norms for offices, shops and other indoor applications. GreenSpace also offers very good colour rendering, while a diffuser cover ensures superior uniformity and glare control. Its long lifetime makes it a true 'fit and forget' solution. This optimised downlight can be used in environments requiring a 'green' general lighting solution, for instance offices, shops, hotels and hospitals.



Features and Benefits

- Light efficacy of up to 93lm/w
- Uniform and diffused lighting effect
- Improved PMMA material; higher diffusion rate
- Superior heat sink design
- Superior solution for retrofitting
- Long lifetime: 50,000 hours

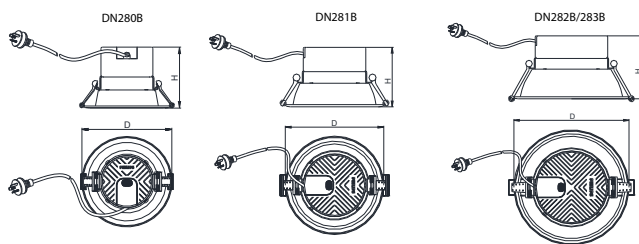

Product ID	Depth (mm)	Height (mm)	Cutout (mm)
DN280B (White)	139	96	ø105 - 110
DN280B (Aluminium)	121	94	ø105 - 110
DN281B (White)	187	103	ø150 - 155
DN281B (Aluminium)	170	103	ø150 - 155
DN282B/ DN283B (White/ Aluminium)	234	117	ø200 - 205
DN280Z Adaptor Ring (White)	138		
DN281Z Adaptor Ring (White)	185		
DN282Z/ DN283Z Adaptor Ring (White)	249		

Dimensions in mm (Nominal)

GREENSPACE GEN III			
Family Name	GreenSpace Gen III	Lifetime L70*	50,000hrs
Model	DN280B - Micro DN281B - Mini DN282B - Compact DN283B - Compact Power	Unified Glare Ratio (UGR)	≥23-25
Lumen/ Watt	R-Series (White) DN280B - 600lm/ 7W DN281B - 1050lm/ 11.6W DN282B - 1550lm/ 17.4W DN283B - 2100lm/ 23W O-Series (Aluminium) DN280B ALU - 600lm/ 7W DN281B ALU PR - 550lm/ 6W DN281B ALU - 1000lm/ 11.6W DN282B ALU - 1500lm/ 17.4W DN283B ALU - 2000lm/ 23W	Dimmable	Non-dimmable. Fixed output only.
Correlated Colour Temperature (CCT)	3000K, 4000K	Installation	Recessed mounting with flexible spring clips
Colour Rendering Index (CRI)	83	IP rating	IP20
Flex and Plug	Yes	Weight	DN280B - 0.18kg DN281B - 0.28kg DN282B/ DN283B - 0.38kg
Optics	MCPET high reflective film, anti fog, high permeable diffusion sheet	Colour of housing	White, Aluminium
Driver	Integrated driver	Application	Retail, Hospitality, Offices
		Accessories	Adaptor rings
		Suspension Height - min/max	NA
		Maximum Run Length	NA

* = When the fitting reaches 70% of full potential (new)



GreenSpace Gen III continued

COMMERCIAL CODE	I2NC	DESCRIPTION
GREENSPACE III MICRO DOWNLIGHT WHITE		
DN280B7W3KFWH	911401575811	DN280B 1xDLED-3000 PSU WH CAU
DN280B7W4KFWH	911401575911	DN280B 1xDLED-4000 PSU WH CAU
GREENSPACE III MINI DOWNLIGHT WHITE		
DN281B12W3KFWH	911401576011	DN281B 1xDLED-3000 PSU WH CAU
DN281B12W4KFWH	911401576111	DN281B 1xDLED-4000 PSU WH CAU
GREENSPACE III COMPACT DOWNLIGHT WHITE		
DN282B17W3KFWH	911401576411	DN282B 1xDLED-3000 PSU WH CAU
DN282B17W4KFWH	911401576511	DN282B 1xDLED-4000 PSU WH CAU
GREENSPACE III COMPACT POWER DOWNLIGHT WHITE		
DN283B23W3KFWH	911401576611	DN283B 1xDLED-3000 PSU WH CAU
DN283B23W4KFWH	911401576711	DN283B 1xDLED-4000 PSU WH CAU
GREENSPACE III MICRO DOWNLIGHT ALUMINIUM		
DN280B7W3KFALU	911401577211	DN280B 1xDLED-3000 PSU ALU G CAU
DN280B7W4KFALU	911401577311	DN280B 1xDLED-4000 PSU ALU G CAU
GREENSPACE III MINI DOWNLIGHT ALUMINIUM		
DN281B6W3KFALU	911401577411	DN281B 1xDLED-3000 PSU ALU PR CAU
DN281B6W4KFALU	911401577511	DN281B 1xDLED-4000 PSU ALU PR CAU
DN281B12W3KFALU	911401577611	DN281B 1xDLED-3000 PSU ALU G CAU
DN281B12W4KFALU	911401577711	DN281B 1xDLED-4000 PSU ALU G CAU
GREENSPACE III COMPACT DOWNLIGHT ALUMINIUM		
DN282B17W3KFALU	911401577811	DN282B 1xDLED-3000 PSU ALU G CAU
DN282B17W4KFALU	911401577911	DN282B 1xDLED-4000 PSU ALU G CAU
GREENSPACE III COMPACT POWER DOWNLIGHT ALUMINIUM		
DN283B23W3KFALU	911401578011	DN283B 1xDLED-3000 PSU ALU G CAU
DN283B23W4KFALU	911401578111	DN283B 1xDLED-4000 PSU ALU G CAU
GREENSPACE III ADAPTOR RINGS		
DN280Z138MMWH	911401700852	DN280Z AD Adaptor Ring
DN281Z185MMWH	911401700862	DN281Z AD Adaptor Ring
DN282Z249MMWH	911401700872	DN282Z AD Adaptor Ring
DN283Z249MMWH	911401700882	DN283Z AD Adaptor Ring