




LumiStone LED

LumiStone is a LED luminaire consisting of two smaller ellipses rather than the traditional single voluminous piece. The ellipses have soft curvatures and resemble smooth stones found in nature. The flexible light effects created with direct and indirect light make LumiStone the perfect choice for inspiring lighting designs. Thanks to its cutting edge LED technology, LumiStone is also highly energy efficient, delivering immediate savings on operational costs.



Features and Benefits

- Inspiring design with elliptical modules
- Creates a truly inspiring environment with appealing design and indirect lighting
- Over 50% energy savings compared to a functional luminaire, and even more compared to decorative solutions
- Many variations thanks to innovative mounting options
- Choice of direct and direct/indirect lighting
- Office compliant for use in all office spaces

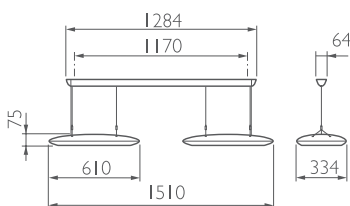

| Product ID | L (mm) | W (mm) | H (mm) |
|----------------|--------|--------|--------|
| SP524P/ SP526P | 1510 | 334 | 75 |

Dimensions in mm (Nominal)



LumiStone LED continued

| LUMISTONE LED | | | |
|-------------------------------------|--|-----------------------------|---|
| Family name | LumiStone | Driver | Integrated driver |
| Model | SP524P - Direct SP526P - Direct/ Indirect | Dimmable | Fixed output and DALI compatible |
| Lumen/Watt | SP524P - Direct 4000lm/ 40W (3000K) 4000lm/ 38W (4000K) SP526P - Direct/ Indirect 3000lm/ 31W (3000K) 3000lm/ 29W (4000K) | Installation | Suspended mounting |
| Correlated Colour Temperature (CCT) | 3000K, 4000K | IP rating | IP40 |
| Colour Rendering Index (CRI) | 80 | Weight | SP524P - 6.15kg SP526P - 6.25kg |
| Flex and Plug | Not included | Colour of housing | White |
| Lifetime L70* | 50,000hrs | Application | Retail, Hospitality, Offices |
| Unified Glare Ratio (UGR) | 19 | Accessories | Coupling pieces (SP480Z CP WH, SP480Z CP SI) |
| Optics | Poly-carbonate LED cup | Suspension Height - min/max | Between 20 and 150 cm from ceiling bar; cable stored in bar |
| | | Maximum Run Length | n/a |

* = When the fitting reaches 70% of full potential (new)

| COMMERCIAL CODE | I2NC | DESCRIPTION |
|---|--------------|--------------------------------|
| LUMISTONE LED - DIRECT LIGHTING | | |
| SP524P31W3KDWH | 910504080403 | SP524P 2xLED15S/830 PSD DCB WH |
| SP524P29W4KDWH | 910504080603 | SP524P 2xLED15S/840 PSD DCB WH |
| LUMISTONE LED - DIRECT/ INDIRECT LIGHTING | | |
| SP524P40W3KDWH | 910504080803 | SP526P 2xLED20S/830 PSD DCB WH |
| SP524P38W4KDWH | 910504081003 | SP526P 2xLED20S/840 PSD DCB WH |