


MASTER TL5 HO 90 Deluxe

Low-pressure mercury discharge lamps with high colour rendering.

- Benefits:**
- Allows system miniaturisation and maximum luminaire design freedom, with lamp lengths defined for easy fitting into ceiling module systems
 - Virtually constant lumen level with good lumen maintenance
 - Excellent colour rendering
- Features:**
- Highly efficient multi-band fluorescent coating in combination with precoating and high lamp load
 - Specifically designed for operation with electronic gear and well suited for dimming
 - Maximum light output reached at approx. 35°C in free-burning position if an electronic ballast without additional electrode heating is used
 - Can be ignited from -15 to +50°C
- Application:**
- Where a high colour recognition is needed: first aid and treatment rooms in hospitals, printing rooms, jewellery manufacturing, dentists, hairdressing, museums and shops

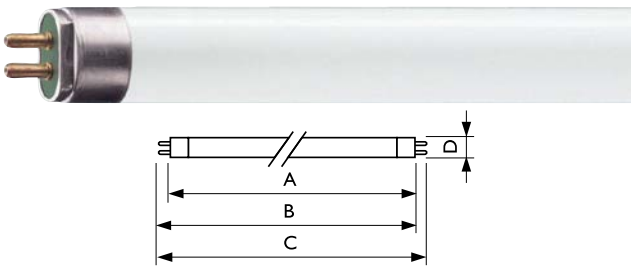

Product ID	A max.	B max.	C max.	D max.
24W	549.0	556.1	563.2	17
54W	1149.0	1156.1	1163.2	17

Dimensions in mm

MASTER TL5 HO 90 DELUXE

Shortcode	Wattage (W)	Cap Base	Luminous Flux Lamp (lm)	Average Lifetime (hrs)	Colour Rendering Index (Ra)	Colour Temp (K)	Min Order Quantity	Carton Qty
TL524W940	24	G5	1600	24000	91	4000	20	20
TL524W950	24	G5	1600	24000	92	5000	20	20
TL554W940	54	G5	4300	24000	91	4000	20	20
TL554W950	54	G5	4300	24000	92	5000	20	20