


Masterline III

Low voltage halogen reflector lamp with double-ended burner and high-purity aluminium reflector. It has a unique infra-red coated burner technology, and revolutionary compact precision burner for maximum performance of the infra-red reflecting coating. The ceramic filament shield reduces glare and improves beam shape. It has a flat profile, very tight beam pattern, and excellent glare control.

Increased lifetime (4,000 hours) ensures low maintenance costs.

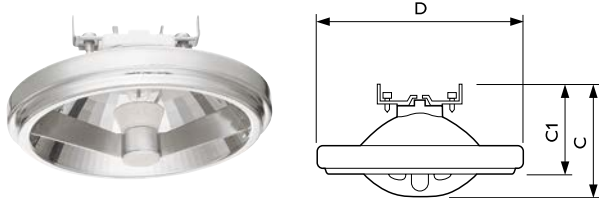

Product ID	Overall Length C max.	Overall Length C1 max.	Diameter D max.
30, 45, 60W	65	49	111

Dimensions in mm

MASTERLINE III

Commercial Code	Wattage (W)	Cap Base	Voltage	Luminous Intensity (cd)	Average Lifetime (hrs)	Colour Temp (K)	Beam Angle °	Carton Qty
MSTIII30WI2V8D	30	G53	12V	23000	4000	3000	8	6
MSTIII30WI2V24D	30	G53	12V	4000	4000	3000	24	6
MSTIII45WI2V8D	45	G53	12V	33000	4000	3000	8	6
MSTIII45WI2V24D	45	G53	12V	5300	4000	3000	24	6
MSTIII45WI2V45D	60	G53	12V	1900	4000	3000	45	6
MSTIII60WI2V8D	60	G53	12V	48000	4000	3000	8	6
MSTIII60WI2V24D	60	G53	12V	8500	4000	3000	24	6
MSTIII60WI2V45D	60	G53	12V	2800	4000	3000	45	6