


PL-T TOP 4-PIN

PL-T TOP (Temperature Optimised Performance) energy saving compact fluorescent lamp. Compact long-arc low-pressure mercury discharge lamp envelope consists of 6 parallel narrow fluorescent tubes. Amalgam controlled operation.

- Benefits:**
- Optimal lighting performance for long periods of continuous operation
 - High temperature independency at higher application temperatures due to Amalgam technology
 - Long life and sustainable light output

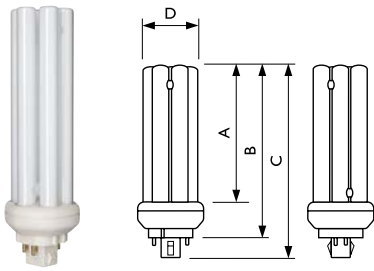

Product ID	Base Face to Base Face A max.	Insertion Length B max.	Overall Length C max.	Width D max.
18W	71.7	96.0	111.7	41.0
26W	86.7	111.0	126.7	41.0
32W	98.7	123.0	138.7	41.0
42W	120.7	145.0	160.7	41.0
57W	157.7	182.0	197.7	41.0

Dimensions in mm

PL-T TOP 4-PIN

Shortcode	Wattage (W)	Cap Base	Luminous Flux Lamp (lm)	Average Lifetime (hrs)	Colour Rendering Index (Ra)	Colour Temp (K)	Min Order Quantity	Carton Qty
PLTT18W8304P	18	Gx24q-2	1200	13000	82	3000	10	50
PLTT18W8404P	18	Gx24q-2	1200	13000	82	4000	10	50
PLTT26W8304P	26	Gx24q-3	1800	13000	82	3000	10	50
PLTT26W8404P	26	Gx24q-3	1800	13000	82	4000	10	50
PLTT32W8304P	32	Gx24q-3	2400	13000	82	3000	10	50
PLTT32W8404P	32	Gx24q-3	2400	13000	82	4000	10	50
PLTT42W8304P	42	Gx24q-4	3200	13000	82	3000	10	50
PLTT42W8404P	42	Gx24q-4	3200	13000	82	4000	10	50
PLTT57W8404P	57	Gx24q-5	4300	13000	82	4000	10	50