


TCW060 Fluorescent Waterproof Batten

Designed for use in demanding environments, TCW060 is an economical, compact waterproof luminaire. Dedicated versions are available for TL-D and TL5 lamps. Ingress-protected to a level of IP65 and operating solely on electronic gear, this is a competitive energy saving solution for wet spaces – at the same cost as an electromagnetic solution. A flexible ceiling clip facilitates easy installation and maintenance.



Features and Benefits

- Economic waterproof luminaire
- Ingress protected to IP65, shockproof to IK08
- Dedicated dimensions for TL-D
- Adjustable ceiling clip for flexible installation

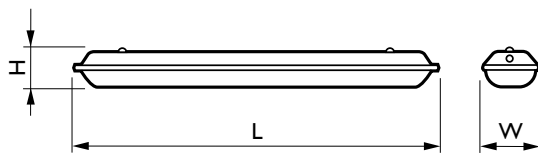

Product ID	L (mm)	W (mm)	H (mm)
TCW060 1xTL-D36W HF	1270	86	90
TCW060 2xTL-D36W HFP	1270	136	90
TCW060 2xTL-D58W HF	1570	136	90

Dimensions in mm (Nominal)

TCW060 FLUORESCENT WATERPROOF BATTEN			
Family name	TCW060	Connection	SI [Screw connection block]
Model	TCW060 1xTL-D36W HF TCW060 2xTL-D36W HFP TCW060 2xTL-D58W HF	Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Number of light sources	1, 2	Mech. impact protection code	IK08 [5] vandal-protected]
Lamp family code	TL-D [MASTER TL-D]	Colour	Grey
Lamp power	36W, 58W	Glow-wire test	650/5 [Temperature 650°C, duration 5s]
Kombipack	No	Country version	No
Gear	HF [Electronic high-frequency], HFP [HF Performer]	CE mark	CE [CE mark]
Optical cover/lens type	PCP [Polycarbonate prismatic]	Input voltage	220-240V
Emergency lighting	No		

COMMERCIAL CODE	I2NC	DESCRIPTION
TCW060136HFPFU	823807877301	TCW060 1xTLD-36W HFP FTB TE
TCW060236HFPFU	823807877401	TCW060 2xTLD-36W HFP FTB TE
TCW060258HFPFU	823807874401	TCW060 2xTLD-58W HFP FTB TE